

<u>Group</u>	<u>Name</u>	
1	Umatilla NF Admin	(Tone Selectable)
2	UMF North Admin	(Alpha Non-Tone Selectable)
3	UMF South Admin	(Alpha Non-Tone Selectable)
4	Umatilla NF North Half	(Tone Selectable)
5	Umatilla NF South Half	(Tone Selectable)
6	N Wallowa Whitman- Wallowa Fire Zone	(Tone Selectable)
7	Central Wallowa Whitman-LaGrande Unit	(Alpha Non-Tone Selectable)
8	S Wallowa Whitman-Whitman Unit	(Tone Selectable)
9	Malheur NF- Blue Mountain RD	(Alpha Non-Tone Selectable)
10	Prairie City RD	(Alpha Non-Tone Selectable)
11	Central Oregon (Dayville)	(Alpha Non-Tone Selectable)
12	Umatilla Type 3 IA	(Tone Selectable)
13	Wallowa Whitman Type 3 IA	(Tone Selectable)
14	*<u>Transitional</u>* South Admin	(Alpha Non-Tone Selectable)
15	Open	



IMPORTANT Changes for 2014

- * Group 14 added temporarily for the 2014 Heppner and NFJD frequency changes.
- * Group 1 temporary Channel changes for the 2014 Heppner and NFJD frequency changes.
- * Receive tones added to many channels to mitigate interference issues,
(use the squelch knob in the counter clockwise position if needed.)
- * The Project & TAC frequency frequency RX toned
- * Frequency & Tone changes for the Wallowa Whitman North End
- * The North TAC channel has been eliminated, one Forest Wide TAC named UMF TAC
- * On Group 5 added Malheur Fire Net

**Using RX tones eliminates unwanted interference from neighboring forests, vehicle ignition/computer noise, gas station noise, as well as other sources.

To use the RX tones on the BK handhelds simply keep the Squelch knob in the CG position (completely counter-clockwise)

Group 1 Umatilla National Forest Admin

CH #	CH Name	RX Freq	TX Freq	Mode	RXTone	TX Tone	FS TONE #
1	UMF TAC	168.2375	168.2375	NB	131.8	131.8	3
2	UMF Project	168.7750	168.7750	NB	131.8	131.8	3
3	Walla Walla	171.7875	163.3750	NB			
	Black Mtn North Repeater	-----	-----		131.8	110.9	1
	Spout Springs Repeater	-----	-----		131.8	114.8	11
	Bone Springs Repeater	-----	-----		131.8	123.0	2
	Lookout Repeater	-----	-----		131.8	131.8	3
	Table Rock Repeater	-----	-----		131.8	103.5	8
4	Heppner	162.9625	166.6875	NB			
	Madison	-----	-----			136.5	4
	Tamarack Repeater	-----	-----			156.7	6
	Black Mtn South Repeater	-----	-----			141.3	13
5	Pomeroy	173.7750	164.8250	NB			
	Tallow Flat Repeater	-----	-----		131.8	156.7	6
	Cottonwood Repeater	-----	-----		131.8	131.8	3
	Robertson Field Repeater	-----	-----		131.8	123.0	2
	Saddle Butte Repeater	-----	-----		131.8	146.2	5
	Diamond Peak Repeater	-----	-----		131.8	151.4	14
	Oregon Butte Repeater	-----	-----		131.8	167.9	7
6	North Fork	164.1250	170.3250	NB			
	Tower Mtn Repeater	-----	-----			141.3	13
	Desolation Repeater	-----	-----			103.5	8
	Bone Point	-----	-----			162.2	15
7	ODF/North East OR	151.1600	159.4425	NB			
	Mt Emily Repeater	-----	-----		131.8	131.8	3
	Black Mtn Repeater	-----	-----		131.8	141.3	13
	Spout Springs Repeater	-----	-----		131.8	179.9*	12
8	WA DNR	159.4200	151.2950	NB			
	Dayton	-----	-----			D223*	9
	Pasco	-----	-----			D271*	10
	Asotin	-----	-----			D365*	16
9	NEW Heppner	171.1375	162.2250				
	Madison	-----	-----		131.8	136.5	4
	Tamarack Repeater	-----	-----		131.8	156.7	6
	Black Mtn South Repeater	-----	-----		131.8	141.3	13
10	NEW North Fork	170.325	164.125	NB			
	Tower Mtn Repeater	-----	-----		131.8	141.3	13
	Desolation Repeater	-----	-----		131.8	103.5	8
	Bone Point	-----	-----		131.8	162.2	15
11	A/G 44	167.6250	167.6250	NB			
12	A/G 9	166.9125	166.9125	NB			
13	A/G 38	167.3750	167.3750	NB			
14	OR SAR	155.8050	155.8050	NB		156.7	6
15	WA SAR	155.1600	155.1600	NB		156.7	6
16	National Air Guard	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 2 UMF North Admin - No Tone Selection

<u>CH #</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	UMF TAC	168.2375	168.2375	NB	131.8	131.8	
2	UMF Project	168.7750	168.7750	NB	131.8	131.8	
3	WW - Black Mtn North	171.7875	163.3750	NB	131.8	110.9	
4	WW - Spout Springs	171.7875	163.3750	NB	131.8	114.8	
5	WW - Bone Springs	171.7875	163.3750	NB	131.8	123.0	
6	WW - Lookout	171.7875	163.3750	NB	131.8	131.8	
7	WW - Table Rock	171.7875	163.3750	NB	131.8	103.5	
8	PM - Tallow Flat	173.7750	164.8250	NB	131.8	156.7	
9	PM - Cottonwood	173.7750	164.8250	NB	131.8	131.8	
10	PM - Robertson Field	173.7750	164.8250	NB	131.8	123.0	
11	PM - Saddle Butte	173.7750	164.8250	NB	131.8	146.2	
12	PM - Diamond Peak	173.7750	164.8250	NB	131.8	151.4	
13	PM - Oregon Butte	173.7750	164.8250	NB	131.8	167.9	
14	A/G 44	167.6250	167.6250	NB			
15	WA SAR	155.1600	155.1600	NB		156.7	
16	National Air Guard	168.6250	168.6250	NB		110.9	

Group 3 UMF South Admin - No Tone Selection

<u>CH #</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	UMF TAC	168.2375	168.2375	NB	131.8	131.8	
2	UMF Project	168.7750	168.7750	NB	131.8	131.8	
3	HP - Madison	162.9625	166.6875	NB		136.5	
4	HP - Tamarack	162.9625	166.6875	NB		156.7	
5	HP - Black Mtn South	162.9625	166.6875	NB		141.3	
6	NF - Tower Mtn	164.1250	170.3250	NB		141.3	
7	NF - Desolation	164.1250	170.3250	NB		103.5	
8	NF - Bone Point	164.1250	170.3250	NB		162.2	
9	ODF - Black Mtn	151.1600	159.4425	NB	131.8	141.3	
10	ODF - Fossil/Madison	151.1450	159.2850	NB	162.2	151.4	
11	A/G 44	167.6250	167.6250	NB			
12	A/G 9	166.9125	166.9125	NB			
13	A/G 38	167.3750	167.3750	NB			
14	A/G 24	168.6375	168.6375	NB			
15	OR SAR	155.8050	155.8050	NB		156.7	
16	National Air Guard	168.6250	168.6250	NB		110.9	

Group 4 Umatilla National Forest North Half

CH#	CH Name	RX Freq	TX Freq	Mode	RXTone	TX Tone	FS TONE #
1	UMF TAC	168.2375	168.2375	NB	131.8	131.8	3
2	A/G 9	166.9125	166.9125	NB			
3	UMF Project	168.7750	168.7750	NB	131.8	131.8	3
4	A/G 44	167.6250	167.6250	NB			
5	Walla Walla	171.7875	163.3750	NB			
	Black Mtn Rptr	-----	-----		131.8	110.9	1
	Spout Springs Rptr	-----	-----		131.8	114.8	11
	Bone Springs Rptr	-----	-----		131.8	123.0	2
	Lookout Rptr	-----	-----		131.8	131.8	3
	Table Rock Rptr	-----	-----		131.8	103.5	8
6	ODF PDT	151.1600	159.4425	NB			
	Mt. Emily Rptr	-----	-----		131.8	131.8	3
	Black Mtn Rptr	-----	-----		131.8	141.3	13
	Spout Springs Rptr	-----	-----		131.8	179.9*	12
7	Pomeroy	173.7750	164.8250	NB			
	Tallow Flat Rptr	-----	-----		131.8	156.7	6
	Cottonwood Rptr	-----	-----		131.8	131.8	3
	Robertson Field Rptr	-----	-----		131.8	123.0	2
	Saddle Butte Rptr	-----	-----		131.8	146.2	5
	Diamond Peak Rptr	-----	-----		131.8	151.4	14
	Oregon Butte Rptr	-----	-----		131.8	167.9	7
8	ODF Courtney Rptr	151.4375	159.3975	NB	131.8	146.2	5
9	OR SAR	155.8050	155.8050	NB		156.7	6
10	WA DNR	159.4200	151.2950	NB			
	Dayton Rptr	-----	-----			D223*	9
	Pasco Rptr	-----	-----			D271*	10
	Asotin Rptr	-----	-----			D365*	16
	Joseph Rptr	-----	-----			D631*	15
11	WA DNR Common TAC	151.4150	151.4150	NB	103.5	103.5	8
12	WA DNR A/G	159.2700	159.2700	NB	103.5	103.5	8
13	ODF White	151.3100	151.3100	NB	156.7	156.7	6
14	ODF Red	151.3400	151.3400	NB	156.7	156.7	6
15	WA SAR	155.1600	155.1600	NB		156.7	6
16	AIR GUARD	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 5 Umatilla National Forest South Half

CH#	CH Name	RX Freq	TX Freq	Mode	RXTone	TX Tone	FS TONE #
1	A/G 9	166.9125	166.9125	NB			
2	A/G 24	168.6375	168.6375	NB			
3	UMF Project	168.7750	168.7750	NB	131.8	131.8	3
4	A/G 38	167.3750	167.3750	NB			
5	A/G 44	167.6250	167.6250	NB			
6	ODF PDT	151.1600	159.4425	NB			
	Mt. Emily Rptr	-----	-----		131.8	131.8	3
	Black Mtn Rptr	-----	-----		131.8	141.3	13
	Spout Springs Rptr	-----	-----		131.8	179.9*	12
7	Heppner	162.9625	166.6875	NB			
	Madison Butte Rptr	-----	-----			136.5	4
	Black Mtn South Rptr	-----	-----			141.3	13
	Tamarack Mtn Rptr	-----	-----			156.7	6
8	ODF John Day	151.2050	159.3750	NB			
	Dixie Butte Rptr	-----	-----		162.2	131.8	3
	Aldrich Mtn Rptr	-----	-----		162.2	162.2	15
9	North Fork	164.1250	170.3250	NB			
	Desolation Rptr	-----	-----			103.5	8
	Tower Mtn Rptr	-----	-----			141.3	13
	Bone Point Rptr	-----	-----			162.2	15
10	ODF WHITE NET	151.3100	151.3100	NB	156.7	156.7	6
11	ODF RED NET	151.3400	151.3400	NB	156.7	156.7	6
12	MAF PROJECT	170.5000	170.5000	NB			
13	MAF Fire Net	167.5000	167.5000	NB			
	Fall Mtn	-----	-----			136.5	4
	Dixie	-----	-----			123.0	2
14	Fossil	151.1450	159.2850	NB			
	Snowboard	-----	-----		162.2	179.9*	12
	Madison	-----	-----		162.2	151.4	14
15	OR SAR	155.8050	155.8050	NB		156.7	6
16	AIR GUARD	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 6 Wallowa Whitman NF- Wallowa Fire Zone

CH#	CH Name	RX Freq	TX Freq	Mode	RXTone	TX Tone	FS TONE #
1	WWF Wallowa Unit	170.6000	164.9625	NB			
	Akers Butte	-----	-----		131.8	100.0	9
	Buckhorn Springs	-----	-----		131.8	123.0	2
	Heavens Gate	-----	-----		131.8	162.2	15
	Mt. Howard	-----	-----		131.8	131.8	3
	Jim Creek	-----	-----		131.8	146.2	5
	Lookout Mtn	-----	-----		131.8	114.8	11
	Pt. Prominence	-----	-----		131.8	127.3	12
	Saddle Butte	-----	-----		131.8	136.5	4
	Somers Pt	-----	-----		131.8	167.9	7
2	NORTH End Direct	166.0000	166.0000	NB	131.8	131.8	3
3	WWF Project	168.1500	168.1500	NB	131.8	131.8	3
4	WWF Tactical	167.5250	167.5250	NB	131.8	131.8	3
5	A/G 44	167.6250	167.6250	NB			
6	A/G 9	166.9125	166.9125	NB			
7	ODF Courtney Rptr	151.4375	159.3975	NB	131.8	146.2	5
8	ODF White Net	151.3100	151.3100	NB	156.7	156.7	6
9	ODF Red Net	151.3400	151.3400	NB	156.7	156.7	6
10	Wallowa County	155.0250	155.7750	NB			
	Sheep Rptr	-----	-----			141.3	13
	Courtney Rptr	-----	-----			114.8	11
	Howard Butte	-----	-----			167.9	7
11	Enterprise FD TAC	153.7700	153.7700	NB	141.3	141.3	13
12	Joseph FD TAC	153.8900	153.8900	NB	141.3	141.3	13
13	Wallowa FD TAC	154.1600	154.1600	NB	141.3	141.3	13
14	Wallowa County SAR	155.8050	155.8050	NB	156.7	156.7	6
15	OR State Fire Marshal	154.2800	154.2800	NB	156.7	156.7	6
16	AIR GUARD	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 7 LaGrande Unit

<u>CH#</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	WWF Project	168.1500	168.1500	NB	131.8	131.8	
2	WWF-Tactical	167.5250	167.5250	NB	131.8	131.8	
3	W-W Mt. Emily FS	170.5250	164.8000	NB		167.9	
4	W-W Mule Peak FS	170.5250	164.8000	NB		151.4	
5	W-W Johnson Rock FS	170.5250	164.8000	NB		103.5	
6	Red Net	151.3400	151.3400	NB	156.7	156.7	
7	White Net	151.3100	151.3100	NB	156.7	156.7	
8	Union County Fire	154.4450	154.4450	WB	173.8	173.8	
9	ODF Mt Emily #2 Rptr	151.2425	159.4050	NB	131.8	131.8	
10	W-W Summit FS	170.4625	164.1500	NB	131.8	141.3	
11	W-W Beaver FS	170.4625	164.1500	NB	131.8	127.3	
12	UMF North Fork Tower FS	164.1250	170.3250	NB		141.3	
13	UMF Project	168.7750	168.7750	NB	131.8	131.8	
14	A/G 9	166.9125	166.9125	NB			
15	A/G 44	167.6250	167.6250	NB			
16	Air Guard	168.6250	168.6250	NB		110.9	

* Designates Non-Standard NWCG Tone

Group 8 Whitman Unit

CH#	CH Name	RX Freq	TX Freq	Mode	RXTone	TX Tone	FS TONE #
1	MAF-Prairie	173.0250	171.5750	NB			
	East Dixie	-----				123.0	2
	East Sheep	-----				146.2	5
	East Antelope	-----				156.7	6
2	UMF-North Fork JD	164.1250	170.3250	NB			
	Tower Mtn	-----				141.3	13
	Desolation	-----				103.5	8
	Bone Point	-----				162.2	16
3	Wallowa-Whitman South	170.4625	164.1500	NB			
	Beaver	-----			131.8	127.3	12
	Summit	-----			131.8	141.3	13
	Mt Ireland	-----			131.8	151.4	14
	Tablerock	-----			131.8	162.2	15
	Sheep	-----			131.8	192.8	16
4	WWF TAC	167.5250	167.5250	NB	131.8	131.8	3
5	WWF Project	168.1500	168.1500	NB	131.8	131.8	3
6	A/G 44	167.6250	167.6250	NB			
7	A/G 9	166.9125	166.9125	NB			
8	ODF-South	151.2425	159.4050	NB			
	Beaver	-----			131.8	162.2	15
	Mt Emily 2	-----			131.8	131.8	3
9	A/G 62	169.3625	169.3625	NB			
10	ODF-Red Net	151.3400	151.3400	NB	156.7	156.7	6
11	ODF-White Net	151.3100	151.3100	NB	156.7	156.7	6
12	A/G 38	167.3750	167.3750	NB			
13	BLM-Lookout Mtn	172.6125	166.3750	NB	88.00	114.8	11
14	BLM-Beaver Rptr	171.6500	166.3000	NB	88.00	107.2	10
15	BLM-SOA Direct	173.6750	173.6750	NB	131.8	131.8	3
16	AIR GUARD	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 9 MALHUER Blue Mountain RD

<u>CH#</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	North Long Creek	172.4000	169.5750	NB		110.9	
2	North Dixie	172.4000	169.5750	NB		123.0	
3	North Aldrich	172.4000	169.5750	NB		131.8	
4	North Fall Mtn	172.4000	169.5750	NB		136.5	
5	North Snow Mtn	172.4000	169.5750	NB		103.5	
6	Project	170.5000	170.5000	NB			
7	North-PORTABLE	172.4000	169.5750	NB		100.0	
8	A/G 38	167.3750	167.3750	NB			
9	FireNet Fall Mtn	167.5000	167.5000	NB		136.5	
10	FireNet Dixie	167.5000	167.5000	NB		123.0	
11	ODF Direct	151.2050	151.2050	NB		162.2	
12	ODF Red Net	151.3400	151.3400	NB		156.7	
13	ODF White Net	151.3100	151.3100	NB		156.7	
14	A/G 24	168.6375	168.6375	NB			
15	BLM-SOA Direct	173.6750	173.6750	NB		131.8	
16	Air Guard	168.6250	168.6250	NB		110.9	

Group 10 MALHUER Prarie City

<u>CH#</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	East Dixie	173.0250	171.5750	NB		123.0	
2	East Sheep	173.0250	171.5750	NB		146.2	
3	East Antelope	173.0250	171.5750	NB		156.7	
4	East King Mtn	173.0250	171.5750	NB		167.9	
5	WWNF Tablerock	170.4625	164.1500	NB		162.2	
6	Project	170.5000	170.5000	NB			
7	East - PORTABLE	173.0250	171.5750	NB		100.0	
8	A/G 38	167.3750	167.3750	NB			
9	North Dixie	172.4000	169.5750	NB		123.0	
10	FireNet Dixie	167.5000	167.5000	NB		123.0	
11	ODF Direct	151.2050	151.2050	NB		162.2	
12	ODF Red Net	151.3400	151.3400	NB		156.7	
13	ODF White Net	151.3100	151.3100	NB		156.7	
14	A/G 24	168.6375	168.6375	NB			
15	BLM-SOA Direct	173.6750	173.6750	NB		131.8	
16	Air Guard	168.6250	168.6250	NB		110.9	

Group 11 Central Oregon (Dayville)

<u>CH#</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	BLM Aldrich Rptr	172.6500	163.1500	NB		123.0	
2	ODF Aldrich Rptr	151.2050	159.3750	NB		162.2	
3	OCH Aldrich Rptr	169.1250	168.1250	NB		151.4	
4	OCH Wolf Rptr	169.1250	168.1250	NB		141.3	
5	OCH Pisgah Rptr	169.1750	170.5500	NB		114.8	
6	BLM Rancheria Rptr	172.6500	163.1500	NB		107.2	
7	OCH Viewpoint Rptr	169.9750	168.7500	NB		114.8	
8	OCH Stephenson Rptr	169.9750	168.7500	NB		151.4	
9	OCH Round Mtn Rptr	169.1750	170.5500	NB		107.2	
10	OCH Grizzly Rptr	169.9750	168.7500	NB		131.8	
11	A/G 61	169.2875	169.2875	NB			
12	BLM R6 Tactical 5	166.7250	166.7250	NB			
13	BLM TAC	173.6750	173.6750	NB			
14	ODF RED NET	151.3400	151.3400	NB		156.7	
15	A/G 37	167.3000	167.3000	NB			
16	Air Guard	168.6250	168.6250	NB		110.9	

* Designates Non-Standard NWCG Tone

Group 12 UMA Type 3 IA

CH #	Name	RX Frequency	TX Frequency	Mode	RXTone	TX Tone	FS TONE #
1	TAC 1	166.7250	166.7250	NB			
2	TAC 2	166.7750	166.7750	NB			
3	TAC 3	168.2500	168.2500	NB			
4	CMD 1	164.1250	170.3250	NB			
	Desolation Rptr	-----	-----			103.5	8
	Tower Mtn Rptr	-----	-----			141.3	13
	Bone Point Rptr	-----	-----			162.2	15
5	CMD 2	171.7875	163.3750	NB			
	Black Mtn Rptr	-----	-----		131.8	110.9	1
	Spout Springs	-----	-----		131.8	114.8	11
	Bone Springs	-----	-----		131.8	123.0	2
	Lookout Repeater	-----	-----		131.8	131.8	3
	Tablerock	-----	-----		131.8	103.5	8
6	CMD 3	173.7750	164.8250	NB			
	Tallow Flat Rptr	-----	-----		131.8	156.7	6
	Cottonwood Rptr	-----	-----		131.8	131.8	3
	Robertson Field Rptr	-----	-----		131.8	123.0	2
	Saddle Butte Rptr	-----	-----		131.8	146.2	5
	Diamond Peak Rptr	-----	-----		131.8	151.4	14
	Oregon Butte Rptr	-----	-----		131.8	167.9	7
7	CMD 4	151.1600	159.4425	NB			
	Mt. Emily	-----	-----		131.8	131.8	3
	Black Mtn	-----	-----		131.8	141.3	13
	Spout	-----	-----		131.8	179.9	12
8	CMD 5	151.4375	159.3975	NB	131.8	146.2	5
9	ODF RED	151.3400	151.3400	NB	156.7	156.7	6
10	ODF WHITE	151.3100	151.3100	NB	156.7	156.7	6
11	UMA PROJECT	168.7750	168.7750	NB	131.8	131.8	3
12	A/G 44	167.6250	167.6250	NB			
13	A/G 9	166.9125	166.9125	NB			
14	OR STATE FIRE MARSHAL	154.2800	154.2800	NB	156.7	156.7	6
15	OPEN						
16	AIR GUARD	168.6250	168.6250	NB		110.9	1

* Designates Non-Standard NWCG Tone

Group 13 W-W Type 3 IA

CH #	Name	RX Frequency	TX Frequency	Mode	RXTone	TX Tone	FS TONE #
1	TAC 1	168.0500	168.0500	NB			
2	TAC 2	168.2000	168.2000	NB			
3	TAC 3	168.6000	168.6000	NB			
4	CMD 1	170.5250	164.8000	NB			
	MT. EMILY	-----	-----			167.9	7
	JOHNSON ROCK	-----	-----			103.5	8
	MULE PEAK	-----	-----			151.4	14
5	CMD 2	170.4625	164.1500	NB			
	Beaver	-----	-----		131.8	127.3	12
	Summit	-----	-----		131.8	141.3	13
	Mt Ireland	-----	-----		131.8	151.4	14
	Tablerock	-----	-----		131.8	162.2	15
	Sheep Mt.	-----	-----		131.8	192.8	16
6	CMD 3	170.6000	164.9625	NB			
	Akers Butte	-----	-----		131.8	100.0	9
	Buckhorn Springs	-----	-----		131.8	123.0	2
	Heavens Gate	-----	-----		131.8	162.2	15
	Mt Howard	-----	-----		131.8	131.8	3
	Jim Creek	-----	-----		131.8	146.2	5
	Lookout Mtn	-----	-----		131.8	114.8	11
	Pt. Prominence	-----	-----		131.8	127.3	12
	Saddle Butte	-----	-----		131.8	136.5	4
	Somers Pt	-----	-----		131.8	167.9	7
7	CMD 4	151.2425	159.4050	NB			
	ODF EMILY	-----	-----		131.8	131.8	3
	ODF BEAVER	-----	-----		131.8	162.2	15
8	CMD 5	151.4375	159.3975	NB	131.8	146.2	5
9	ODF RED	151.3400	151.3400	NB	156.7	156.7	6
10	ODF WHITE	151.3100	151.3100	NB	156.7	156.7	6
11	WWF PROJECT	168.1500	168.1500	NB	131.8	131.8	3
12	A/G 44	167.6250	167.6250	NB			
13	A/G 9	166.9125	166.9125	NB			
14	OR STATE FIRE MARSHAL	154.2800	154.2800	NB	156.7	156.7	6
15	WWF TAC	167.5250	167.5250	NB	131.8	131.8	3
16	AIR GUARD	168.6250	168.6250	NB		110.9	1


* Designates Non-Standard NWCG Tone

Group 14 *Transitional* UMF South Admin* NEW FREQUENCIES* - No Tone Selection

<u>CH #</u>	<u>CH Name</u>	<u>RX Freq</u>	<u>TX Freq</u>	<u>Mode</u>	<u>RXTone</u>	<u>TX Tone</u>	<u>FS TONE #</u>
1	UMF TAC	168.2375	168.2375	NB	131.8	131.8	
2	UMF Project	168.7750	168.7750	NB	131.8	131.8	
3	HP - Madison	171.1375	162.2250	NB	131.8	136.5	
4	HP - Tamarack	171.1375	162.2250	NB	131.8	156.7	
5	HP - Black Mtn South	171.1375	162.2250	NB	131.8	141.3	
6	NF - Tower Mtn	170.3250	164.1250	NB	131.8	141.3	
7	NF - Desolation	170.3250	164.1250	NB	131.8	103.5	
8	NF - Bone Point	170.3250	164.1250	NB	131.8	162.2	
9	ODF - Black Mtn	151.1600	159.4425	NB	131.8	141.3	
10	ODF - Fossil/Madison	151.1450	159.2850	NB	162.2	151.4	
11	A/G 44	167.6250	167.6250	NB			
12	A/G 9	166.9125	166.9125	NB			
13	A/G 38	167.3750	167.3750	NB			
14	A/G 24	168.6375	168.6375	NB			
15	OR SAR	155.8050	155.8050	NB		156.7	
16	National Air Guard	168.6250	168.6250	NB		110.9	


* Designates Non-Standard NWCG Tone

North Half Repeater Map

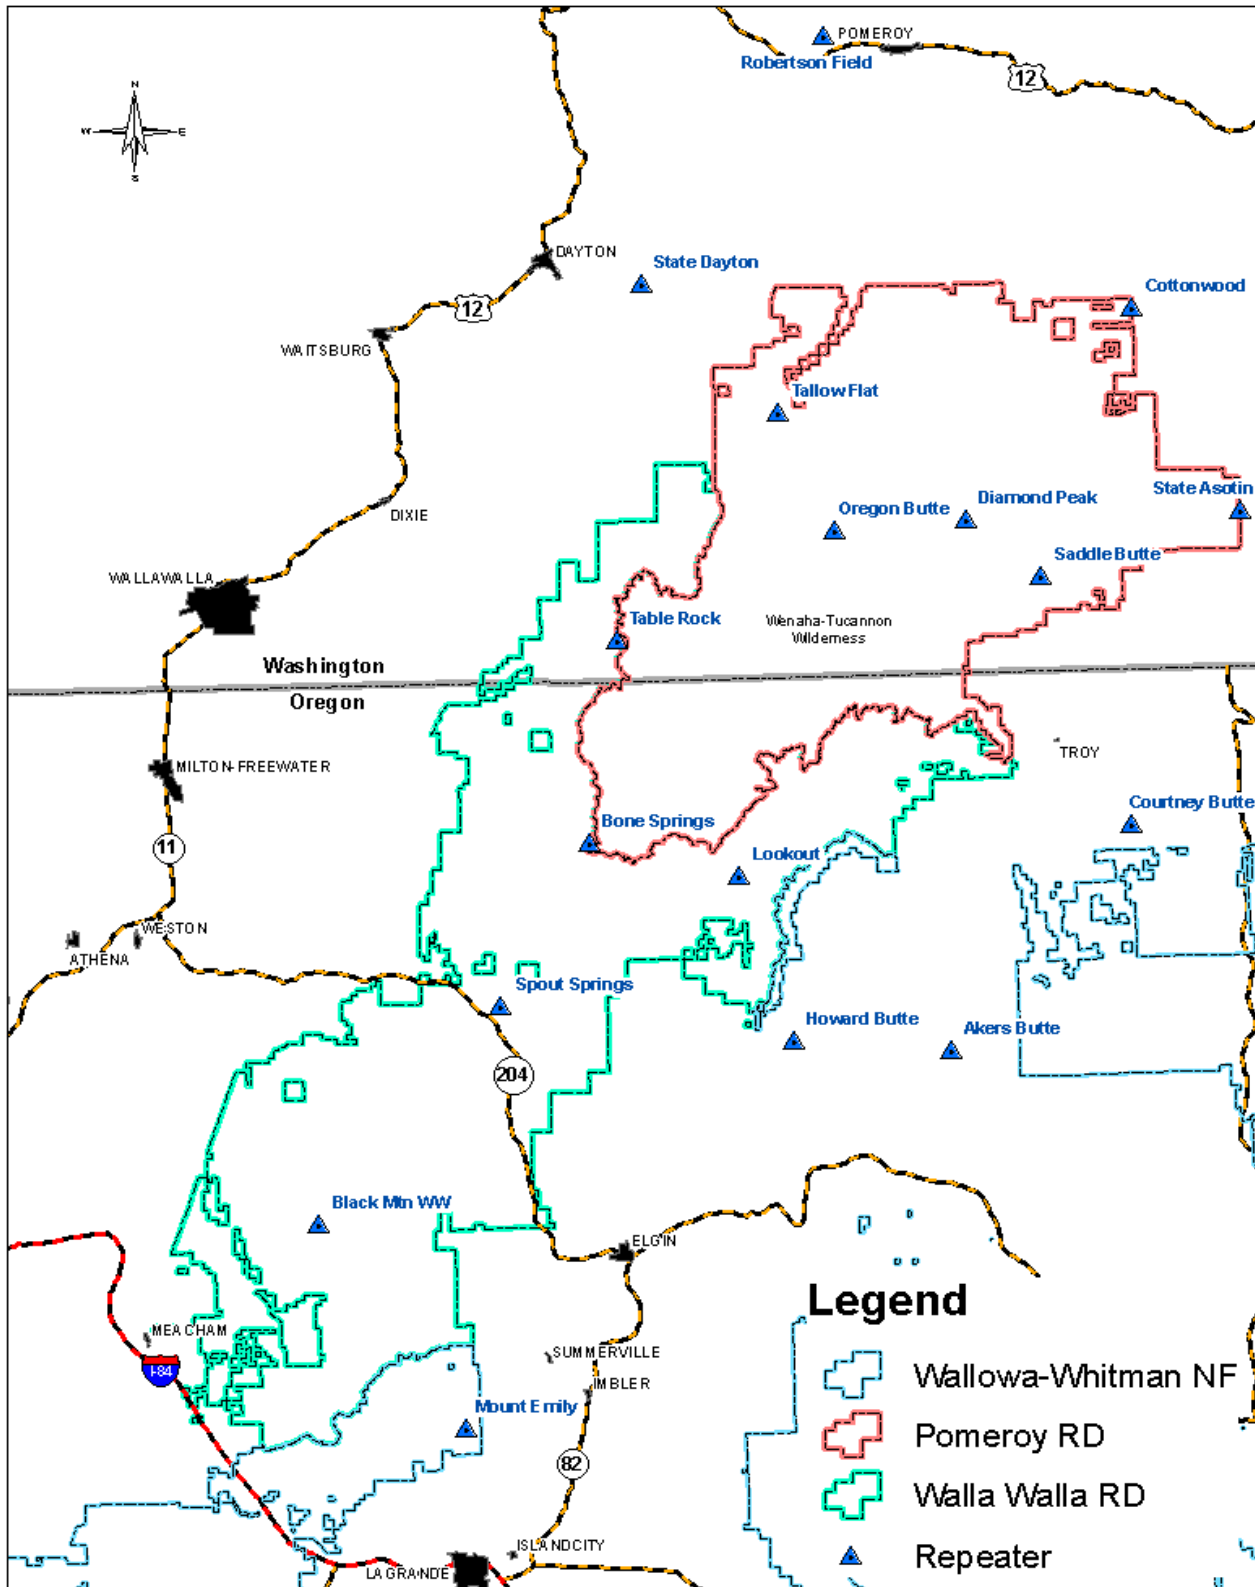

* Designates Non-Standard NWCG Tone

South Half Repeater Map

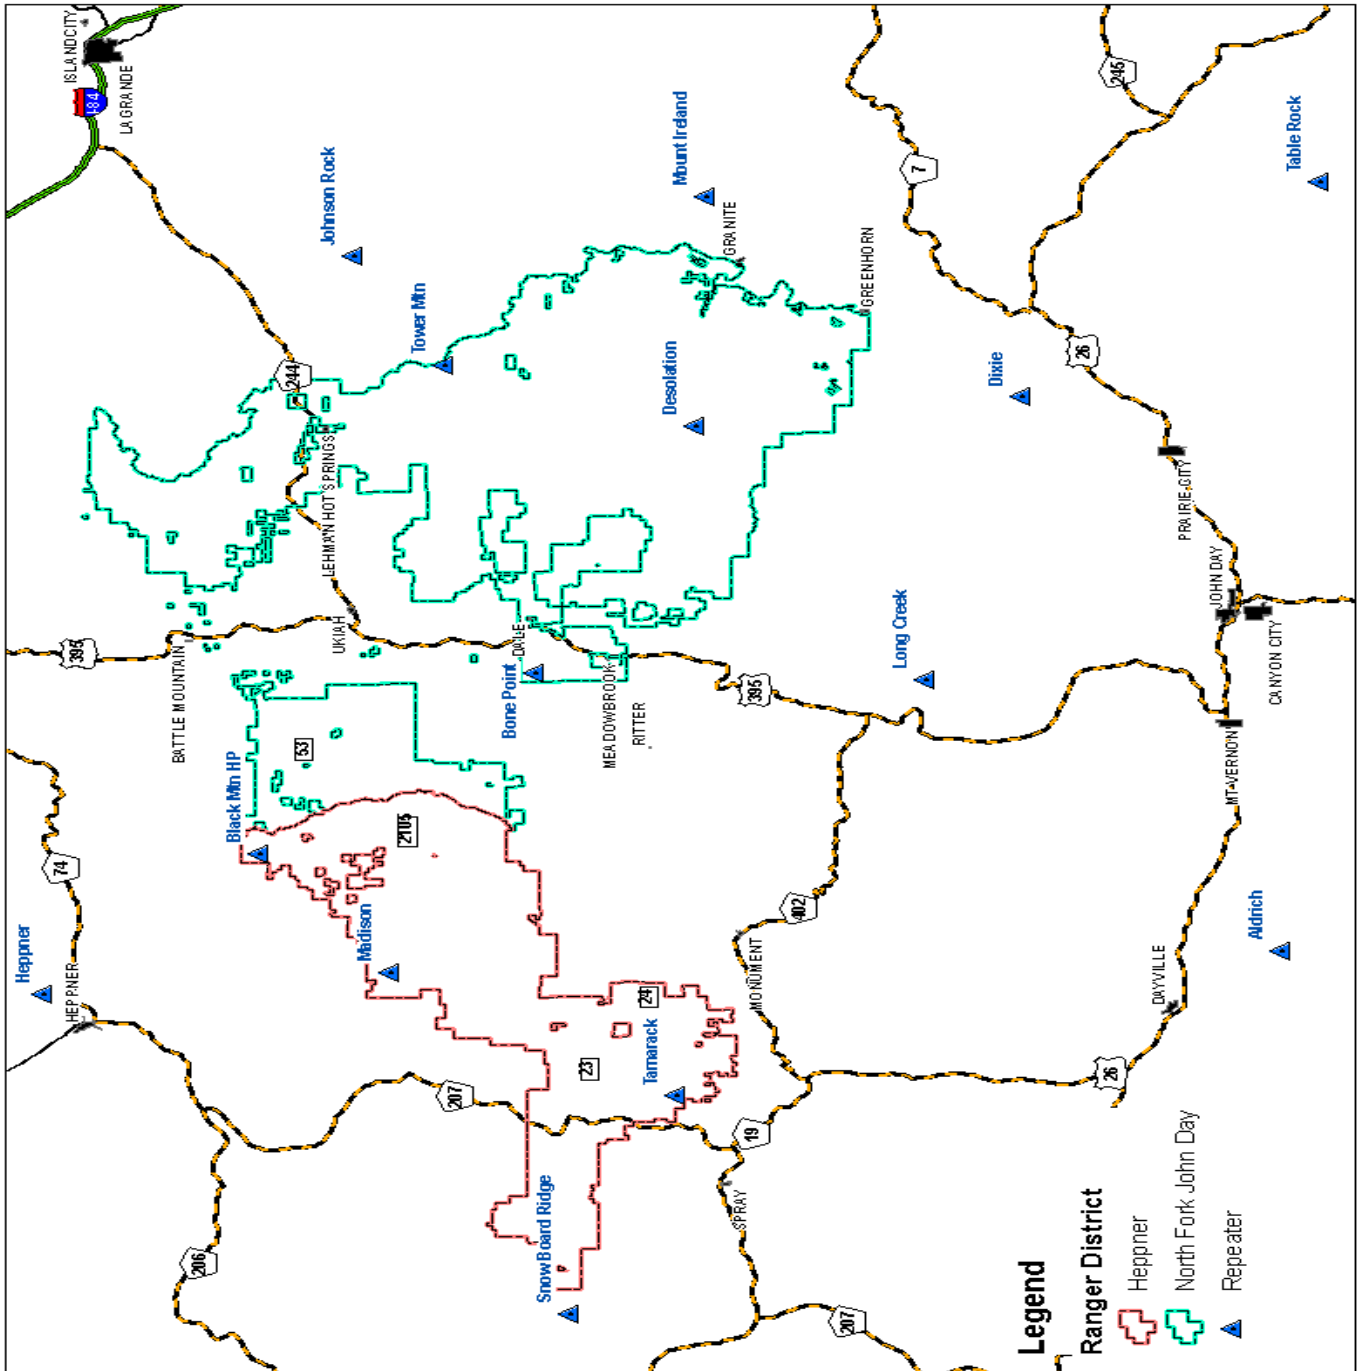

* Designates Non-Standard NWCG Tone

BK Handheld Operation


To Transmit press the PTT (push to talk) button on the side of the radio, or mic. When transmitting the red transmit indicator glows and TX appears in the display. Talk in a normal voice with mic 1-2 inches from your mouth. Release the PPT switch to stop transmitting.

TURN RADIO ON by turning the volume knob clockwise. A beep will indicate the radio is on. The current group will display momentarily, then change to the main channel screen showing the current channel and group #

Toggle Switches For basic operation the Priority and Scan toggles should be flipped towards the front of the radio. The HI/Low Toggle selects the transmit power of the radio.



BK Mobile Operation

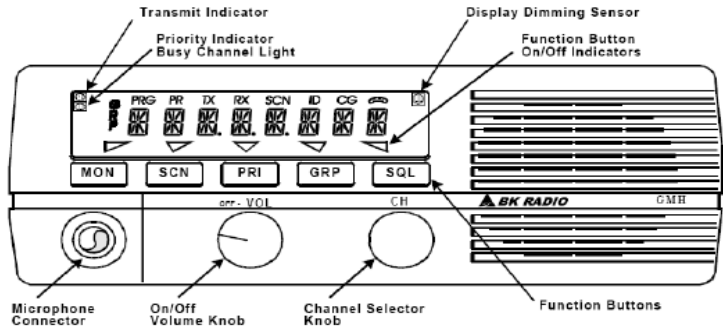

Turn Power on: for the GMH turn the volume knob clockwise. On the DMH radio hold the volumn knob down briefly. A beep will indicate the radio is on.

The Function buttons

[MON]	Monitor	[GRP]	Group #
[SCN]	Scan	[SQL]	Squelch Button
[PRI]	Primary Channel		

SELECT GROUP by pressing the # key, the current group will be displayed. Using the keypad enter the desired group number. Press the # key again, or wait 5 seconds and the radio will return to the channel screen.

SELECT the CHANNEL of closest repeater by turning the channel selector knob.

ENABLE RECEIVE TONE by turning the CG-SQ knob clockwise until it stops. To return to normal mode turn slightly clockwise just past the click.

TONE SELECTION *The scan toggle sw must be in the off (forward position).* At the main channel display screen. Simply press a number on the keyboard corresponding to the repeaters tone. *The scan toggle sw can be turned back on if that function is desired.*

SET SQUELCH by turning the CG-SQ knob clock-wise until you hear static. Then turn the CG-SQ knob counter-clockwise slowly just until the static stops.

Set Volume by pressing the [MON] key to hear squech noise. Turn the Volume knob to set a comfortable level. Press the [MON] key again to stop squelch noise.

Select Group by pressing the [GRP] key and turning the Channel select knob. Press the [GRP] key again to return to the channel screen.

SELECT the CHANNEL of closest repeater by turning the channel selector knob.

TONE SELECTION *Scan must be off.* At the main channel display screen press a number on the Mic keypad corresponding to the repeaters tone.

*If the Portable radio displays LOCKED, you can unlock it by holding the [FCN] key for a moment.